



# MSE Berm: Maximize Landfill Air Space for Your CCR Impoundment Closure

Johnny Lowe, PE



# Agenda

## 1. Site History

Mountain Energy Act changes the closure approach as new regulatory deadline nears.

## 2. Site Constraints

Active facility, topographic changes, jurisdictional wetlands made landfill siting a challenge.

## 3. Design and Construction

MSE Berm is welded wire baskets backed by geogrid, backfilled, & vegetated that are installed working from one end (i.e., STA 0+00) to the other.

## 4. MSE Berm Considerations

Attention to detail, safety when working at heights, labor intensity of construction, tie-in to landfill are unique to incorporation of MSE Berm.

## 5. Unexpected Site Conditions

Bedrock in MSE Berm footprint forced a redesign with installation splitting berm in three sections.

## 6. Benefits and Additional Challenges

Improved efficiency and added safety.

# Site History

## **Mountain Energy Act**

**An act to direct the North Carolina Utilities Commission to render an expedited decision on applications to convert to natural gas**

**As part of the natural gas conversion, the coal combustion residuals surface impoundments at this site were designated high-priority with the need to close as soon as possible, but no later than August 1, 2022. This timeline is expedited compared to federal regulations.**



# Closure approach

## 2016 to 2020

Began with excavation and off-site disposal from the basin as a fast and environmentally sound approach to reduce on-site volumes. WM excavated, transported, and disposed of 2,000,000 tons of CCR at our R&B Landfill. Client continued to evaluate a range of closure options and worked with their Engineer of Record to develop a detailed closure plan.



## 2020 to 2022

WM began our third contract tied to closure of the basin. The approach transitioned from excavation and off-site disposal to excavation and on-site disposal. To support the new approach, WM continued preparation of the basin through dewatering and ash conditioning while we constructed the on-site landfill, which was sited in accordance with the various regulatory criteria.



# Site Constraints



# Active facility




- Bound on all sides with no opportunity for expansion



- Unavailable landfill site occupied by coal fired plant in the process of being demolished



- Unavailable landfill site occupied by an active combined cycle plant

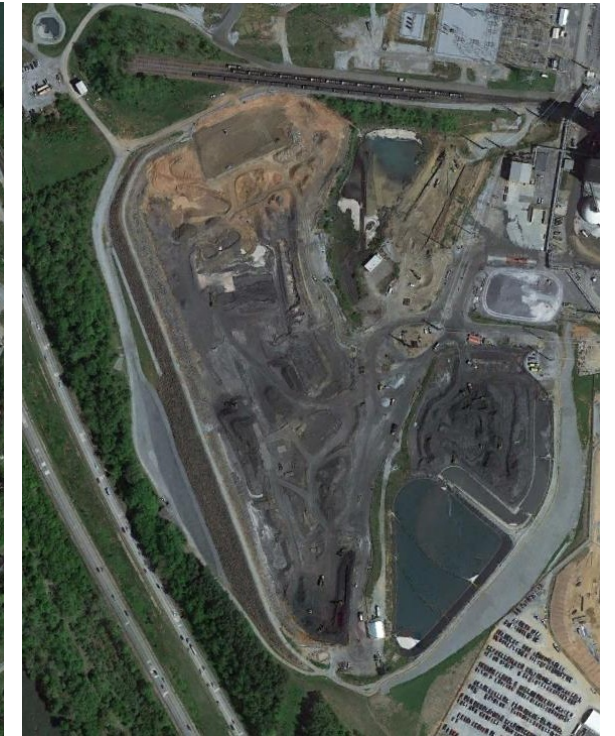

- Unavailable landfill site occupied by Ash Basin in need of closure



## Available location

Met regulatory requirements but posed landfill design challenges

After years of transporting CCR off-site for disposal, the decision was made to construct an on-site landfill. The only viable location was a small parcel previously used as a laydown area for the combined cycle construction project. It had significant changes in topography as well as adjacent wetlands along the northwestern side.



CONFIDENTIAL AND PROPRIETARY  
INFORMATION OF WM





# Disposal volume vs. airspace


- Ash Basin
  - 46.4-acre former disposal area for CCR
  - Approximately 2,000,000 yd<sup>3</sup> had already been disposed of off-site
  - Remaining 998,000 yd<sup>3</sup> to be disposed of in the on-site landfill following construction
- Landfill Location
  - Limited to approximately 10-acre level area for traditional landfill geometry
  - Airspace would be similarly limited to approximately 480,000 yd<sup>3</sup> considering a height of 30'
- Maximizing Airspace
  - Utilize natural topographic change to extend landfill footprint to approximately 12.5 acres
  - Incorporate a Mechanically Stabilized Earth (MSE) Berm to retain CCR on the sloped side
  - Increases airspace to approximately 1,100,000 yd<sup>3</sup>

# Design and Construction

# NW side of landfill contained by MSE Berm

First such application of MSE Berm for a landfill permitted in the state

Given the relatively small footprint for the landfill and the remaining volume of ash in the larger ash basin being closed, the Engineer of Record incorporated a MSE Berm into the traditional landfill design. The 1,583 foot long and approximately 75-foot tall MSE Berm runs along the northwest side, up the existing slope, and effectively separates the CCR Landfill from the adjacent wetlands while increasing airspace in the landfill.

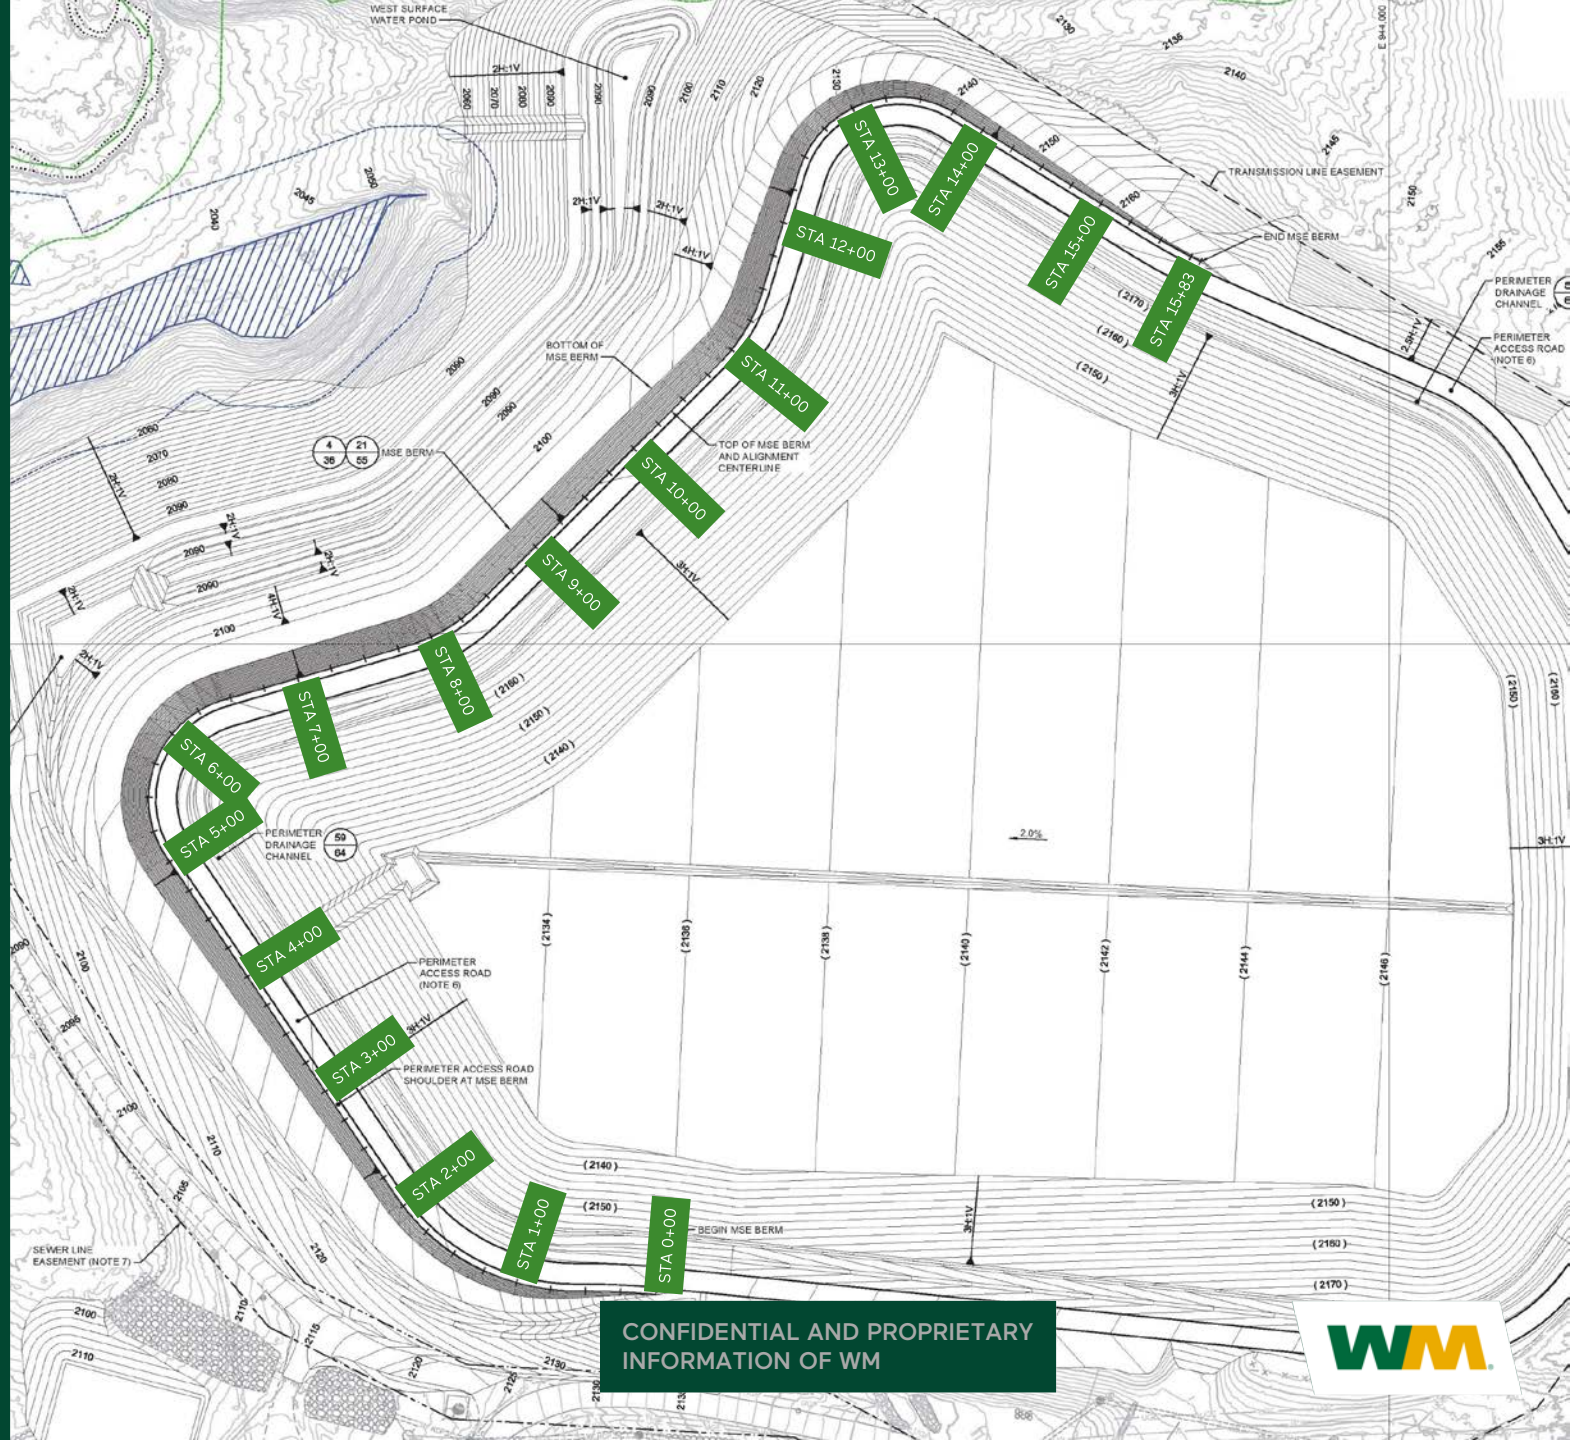

CONFIDENTIAL AND PROPRIETARY INFORMATION OF WM






## 47 courses to reach final MSE Berm height

Each course is 1.5' high welded wire basket, placed on a 6" batter


Structural geogrid started each course with a welded wire basket face, wrapped in geogrid & erosion control blanket. A combination of fill materials was to be used (i.e., MSE Berm Fill, Topsoil, and General Fill) behind the face. A back drain was included in the design to allow for stormwater drainage.

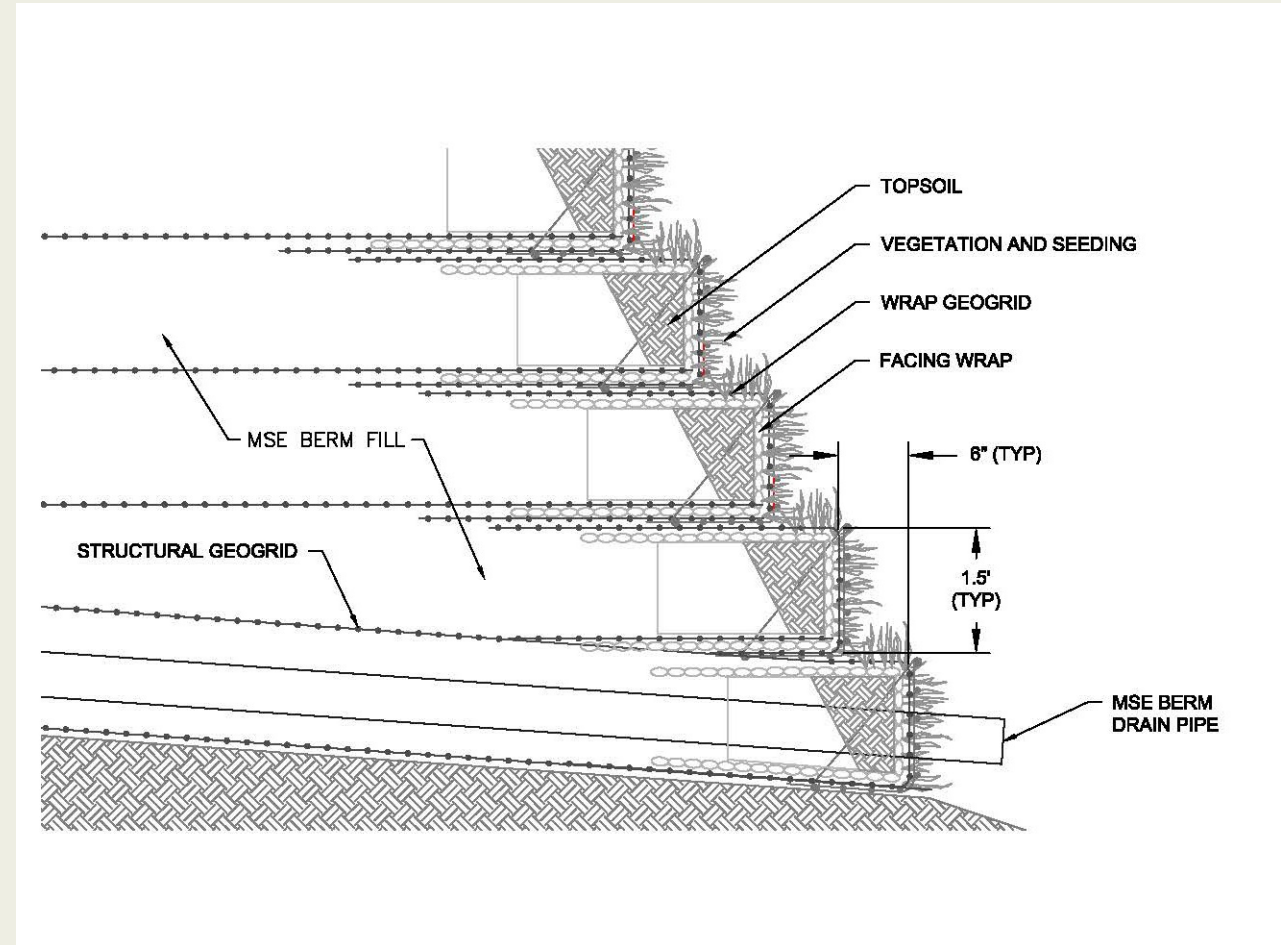

## Back drain for stormwater drainage

Required every 200' along face of MSE Berm

Back drains were to be placed within the MSE Berm Fill and consist of 6" diameter perforated pipe. A 2' wide by 10' tall area of #57 stone wrapped in geotextile was to surround the perforated pipe. Each back drain was to be connected to a 6" diameter solid pipe that daylights out the face of the MSE Berm.

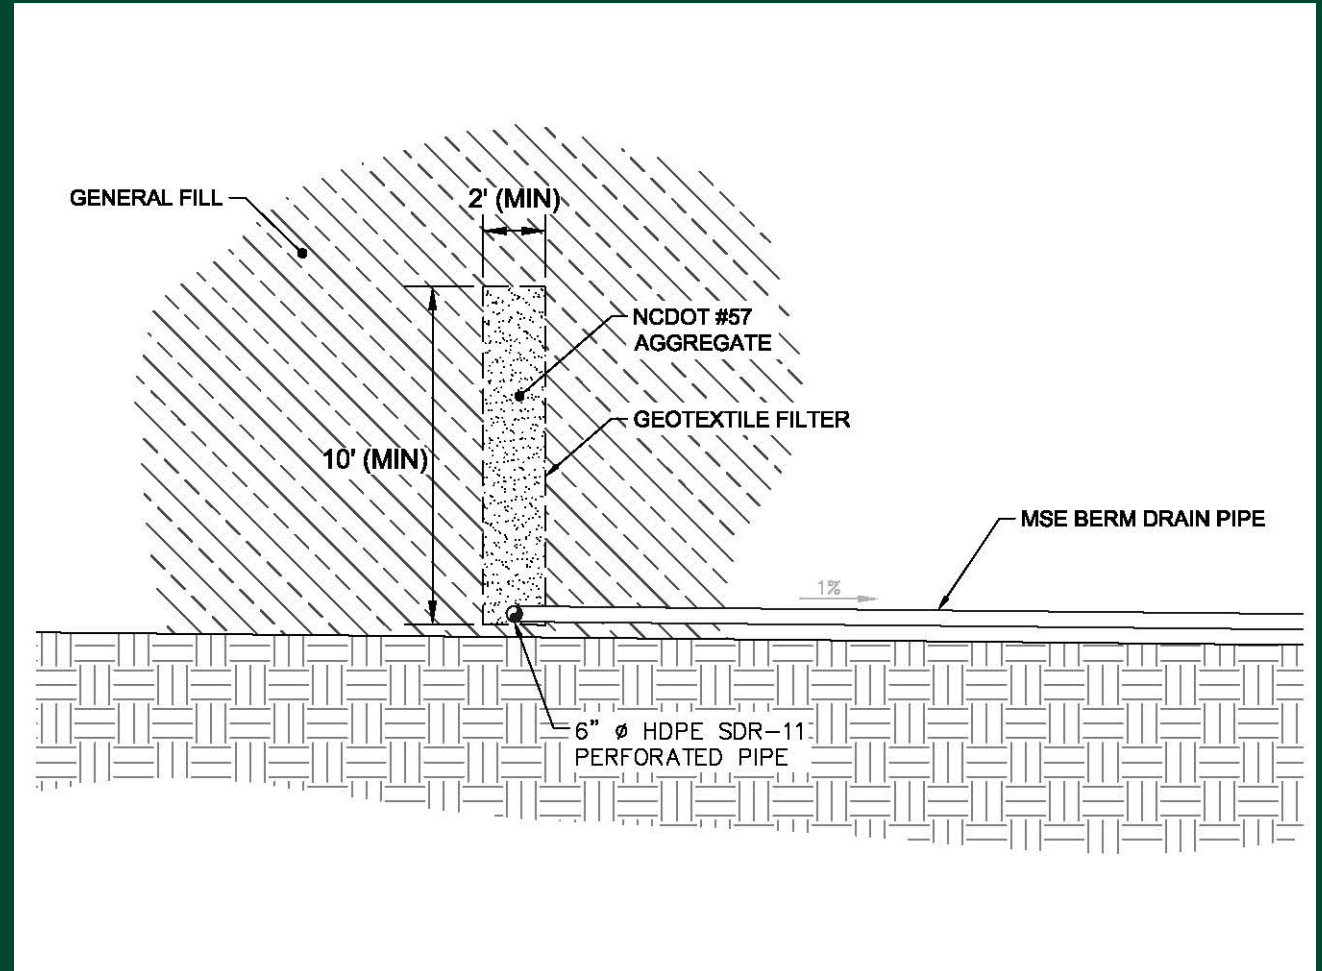

# Each course is constructed in similar fashion



- Welded wire basket is placed at the front of the MSE Berm to start the course
- Diagonal braces are placed every 2' along the front



- Geogrid & erosion control blanket are wrapped at the front of the MSE Berm
- A section is left at the front to overlap the backfill after placement



- Structural geogrid is placed behind the basket face of the MSE Berm
- Material properties and length varies by course



- MSE Berm Fill & General Fill are used as backfill between geogrid layers
- Each are compacted as per specifications



**Each course is finished the same**

**New tasks in each course lag behind the prior and follow until course is complete.**


- **Back drains are constructed with each course until the final back drain elevation is met**
- **Topsoil is placed at face of MSE Berm for each lift of fill material**
- **Compaction is by hand equipment to avoid damage to the welded wire basket**
- **The face of MSE Berm is vegetated at completion**

# MSE Berm Considerations

# Attention to Detail

## Leveling course required to tie into existing slopes

Since baskets can't be placed at angles, level areas need to be created to allow baskets to be placed squarely where tying into existing slopes. These are starting points for each course.

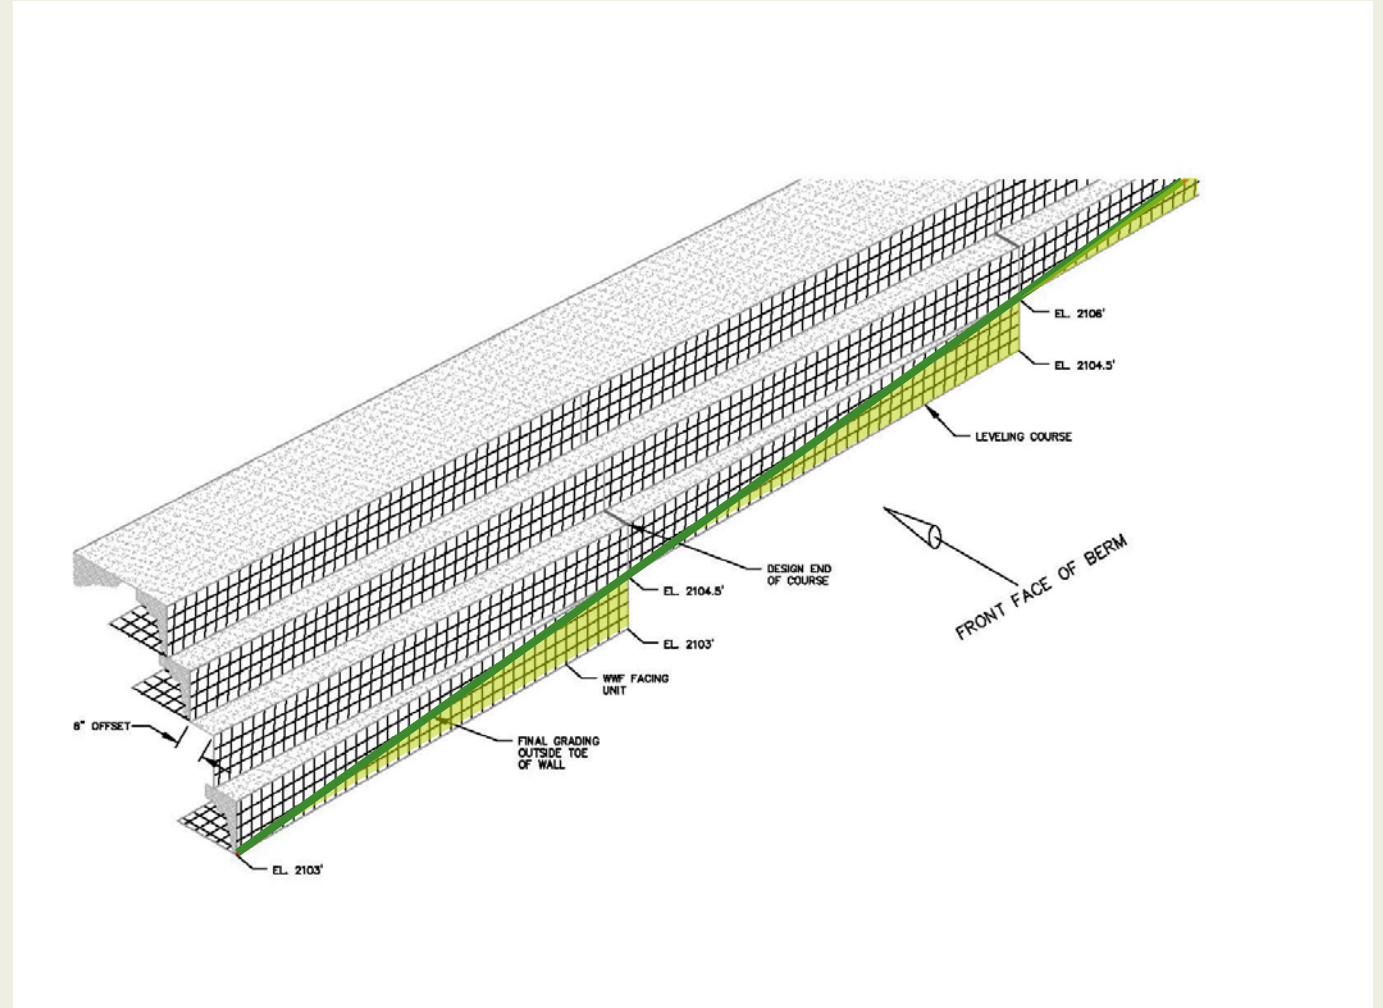




# Attention to Detail

## Interior corners are complicated by geogrid overlaps

Construction of interior corners take longer as geogrid placement begins to overlap in these tight spaces. In addition, MSE Berm Fill is required to be placed between overlapping geogrid layers.

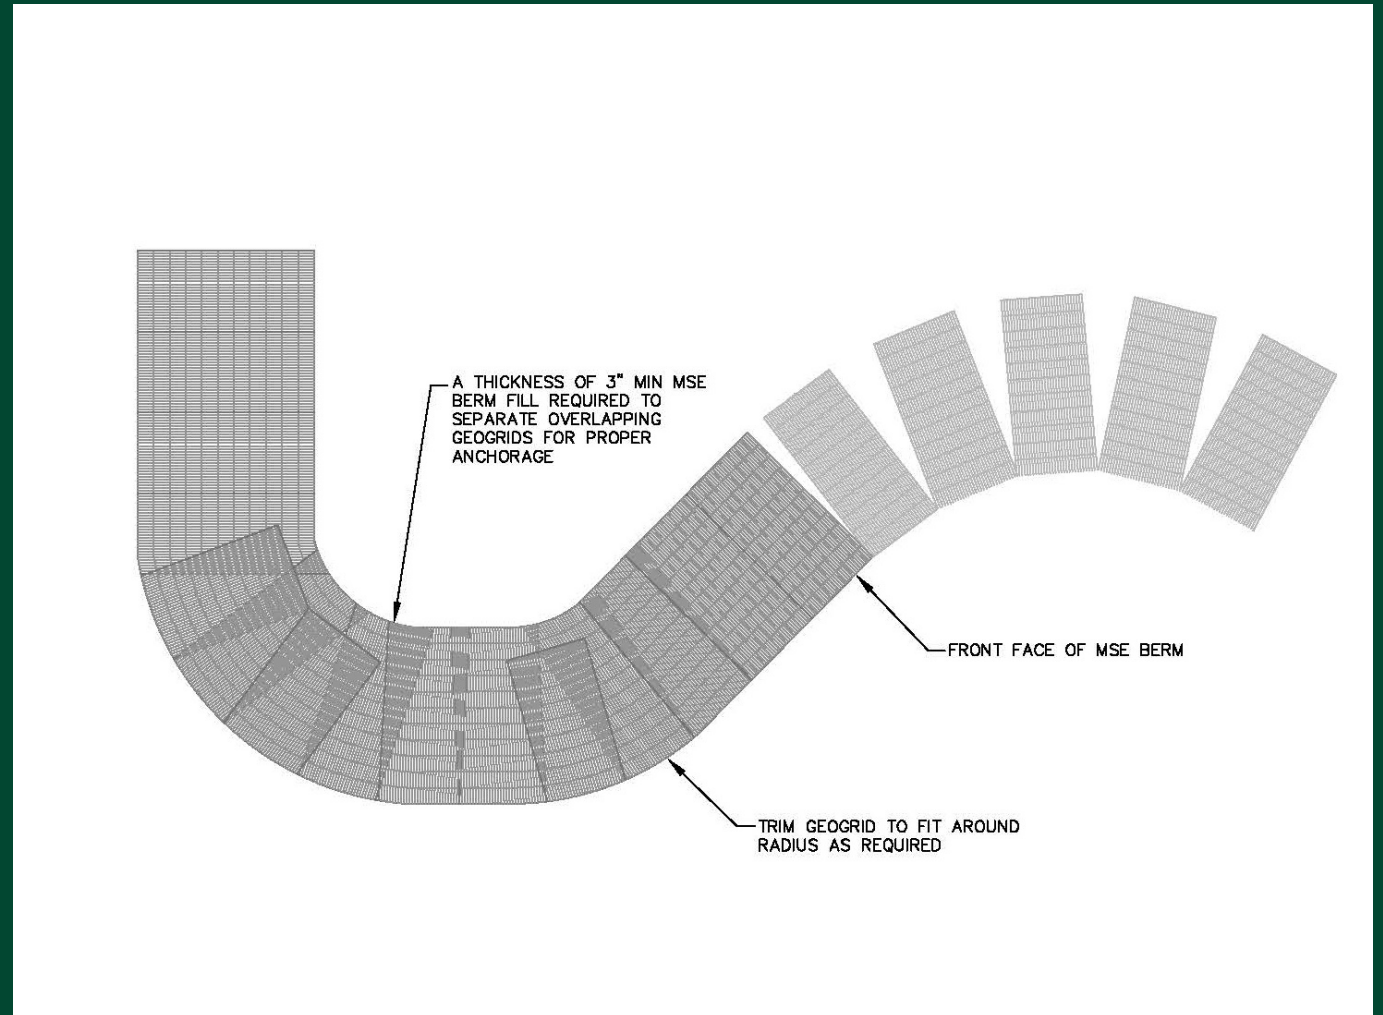

## Attention to Detail

Starting the next course must be precise

Each course has a 6" batter from the prior course. The survey crew must verify the wall edge to establish the baseline for setting the following course.





# Safety when working at heights



- OSHA requires fall protection at heights of 6' which for this site was courses 4 through 47

- Signage with visual barriers were used to warn of fall hazard and to restrict personnel access

- Concrete blocks were placed along the length of MSE Berm as anchor points for tie off lines

- Safety for wildlife also became a concern as height of MSE Berm increased



# Labor intensity of construction



## Most work was done manually

Wire welded baskets and wrapping were all placed by hand. To prevent bulging at the front of the wall, compaction was via hand tools instead of heavy equipment. Installation was scheduled for 80 working days




## Large crew working in tight space

Subcontractor crew size of approximately 10-12 dedicated to MSE Berm construction. WM had an additional 7 personnel supporting with backfill and geogrid placement that tied into the overall landfill construction

# Tie-in to landfill

STA 8+00 which is typical


Required excavation at a 2.5:1 slope from the back of the MSE Berm into the landfill, which was a considerable amount of over excavation compared to typical landfill installation. Layers of structural geogrid extended back as far as 90' from the MSE Berm towards the landfill. MSE Berm installation needed to be complete through Course 47 before the landfill subgrade and liner installation could begin.

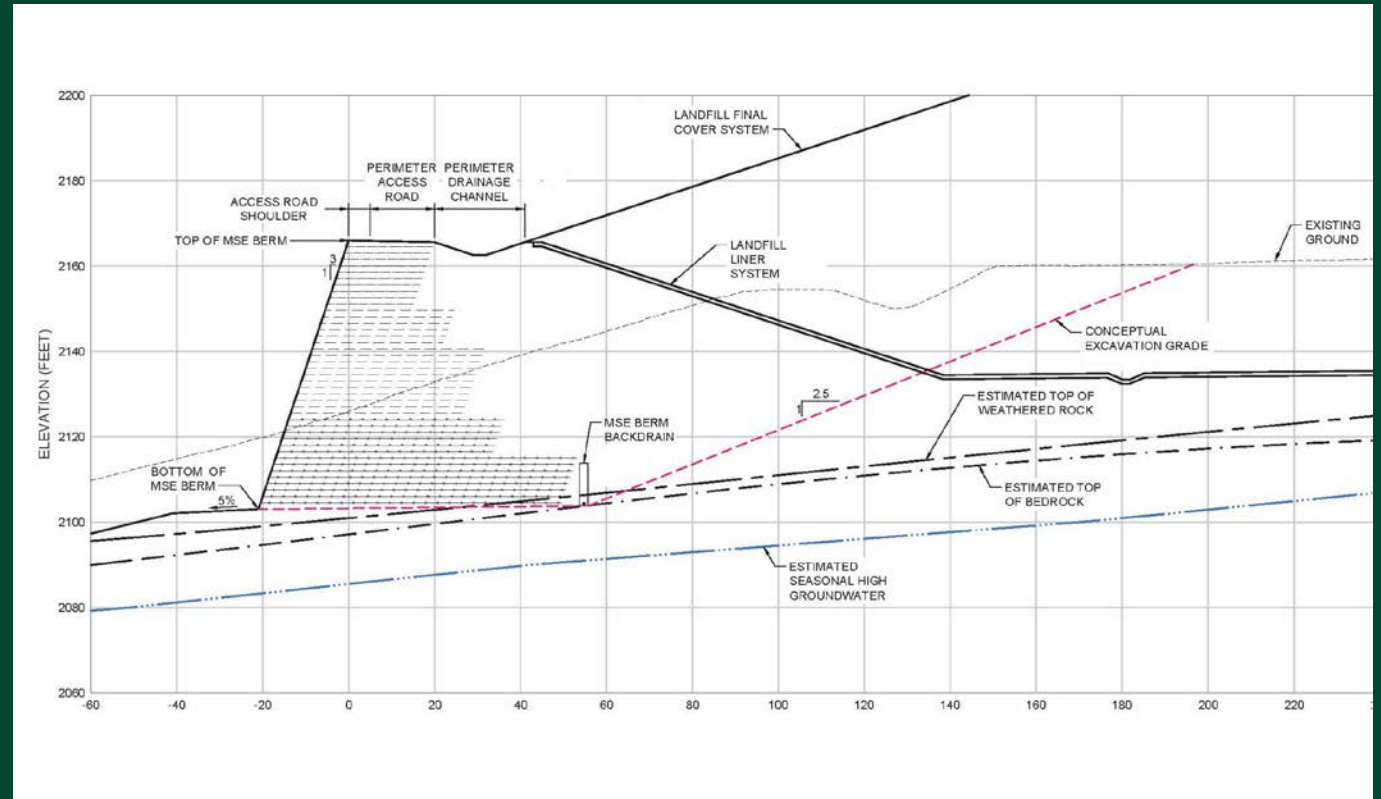

# Unexpected Site Conditions




# Bedrock in MSE Berm footprint

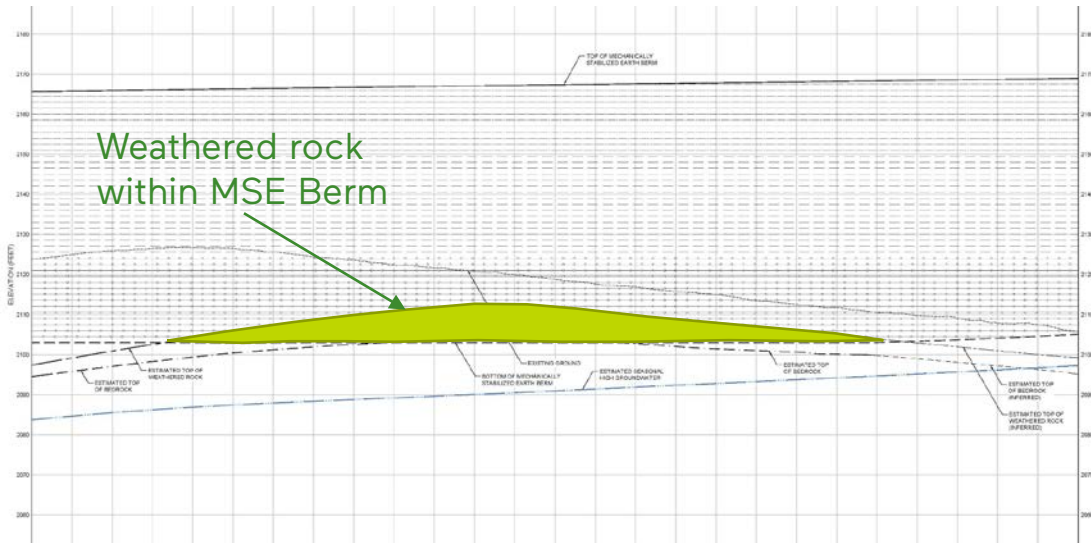

## Anticipated Conditions

Bedrock (i.e., unrippable rock) would not be encountered within the MSE Berm footprint. Rock was to be limited to weathered rock between STA 8+00 and STA 10+00.

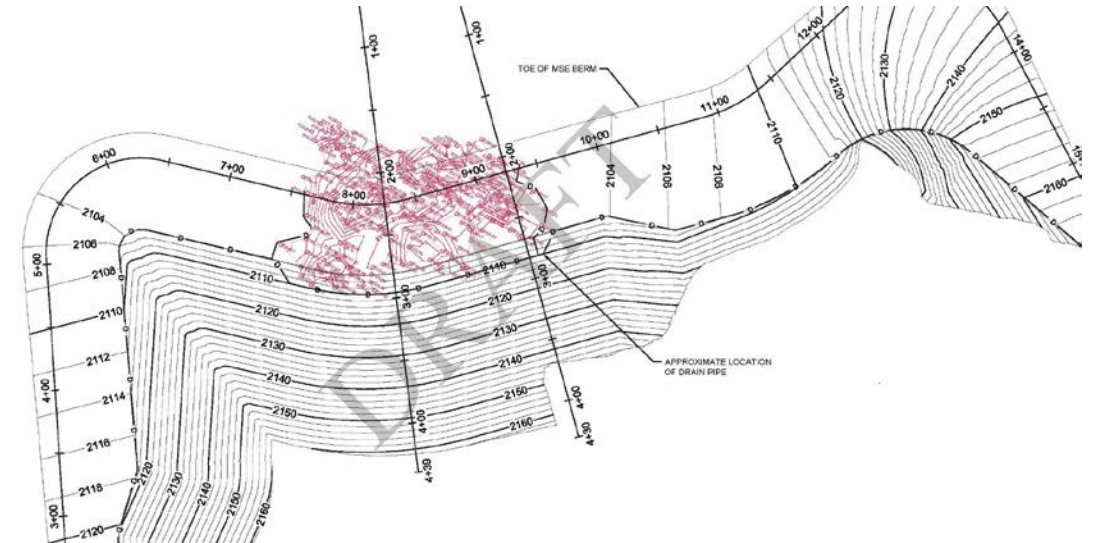

## Actual Conditions

Bedrock, not weathered rock, was encountered within the MSE Berm footprint between STA 4+00 and STA 4+60 and again between STA 7+60 and STA 9+40.

## Bedrock in MSE Berm footprint



# Design Resolution

### STA 4+00 to STA 4+60

- Rock to be removed
- MSE Berm to be constructed as per original design with no modifications

### STA 7+60 to STA 9+40

- Rock to remain in place
- MSE Berm to be redesigned around exposed bedrock
- New configuration included adjustment to geogrid requirements and additional drain pipe installation
- Slope stability analysis conducted on new MSE Berm configuration under long-term static and seismic loading conditions

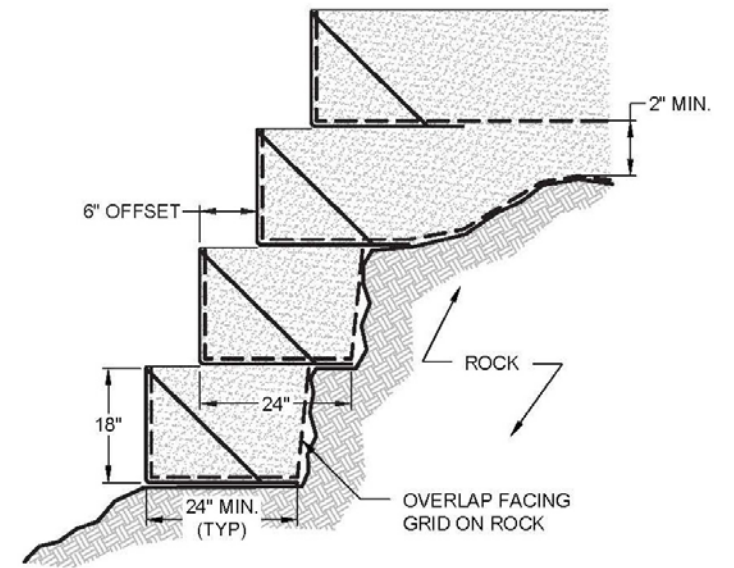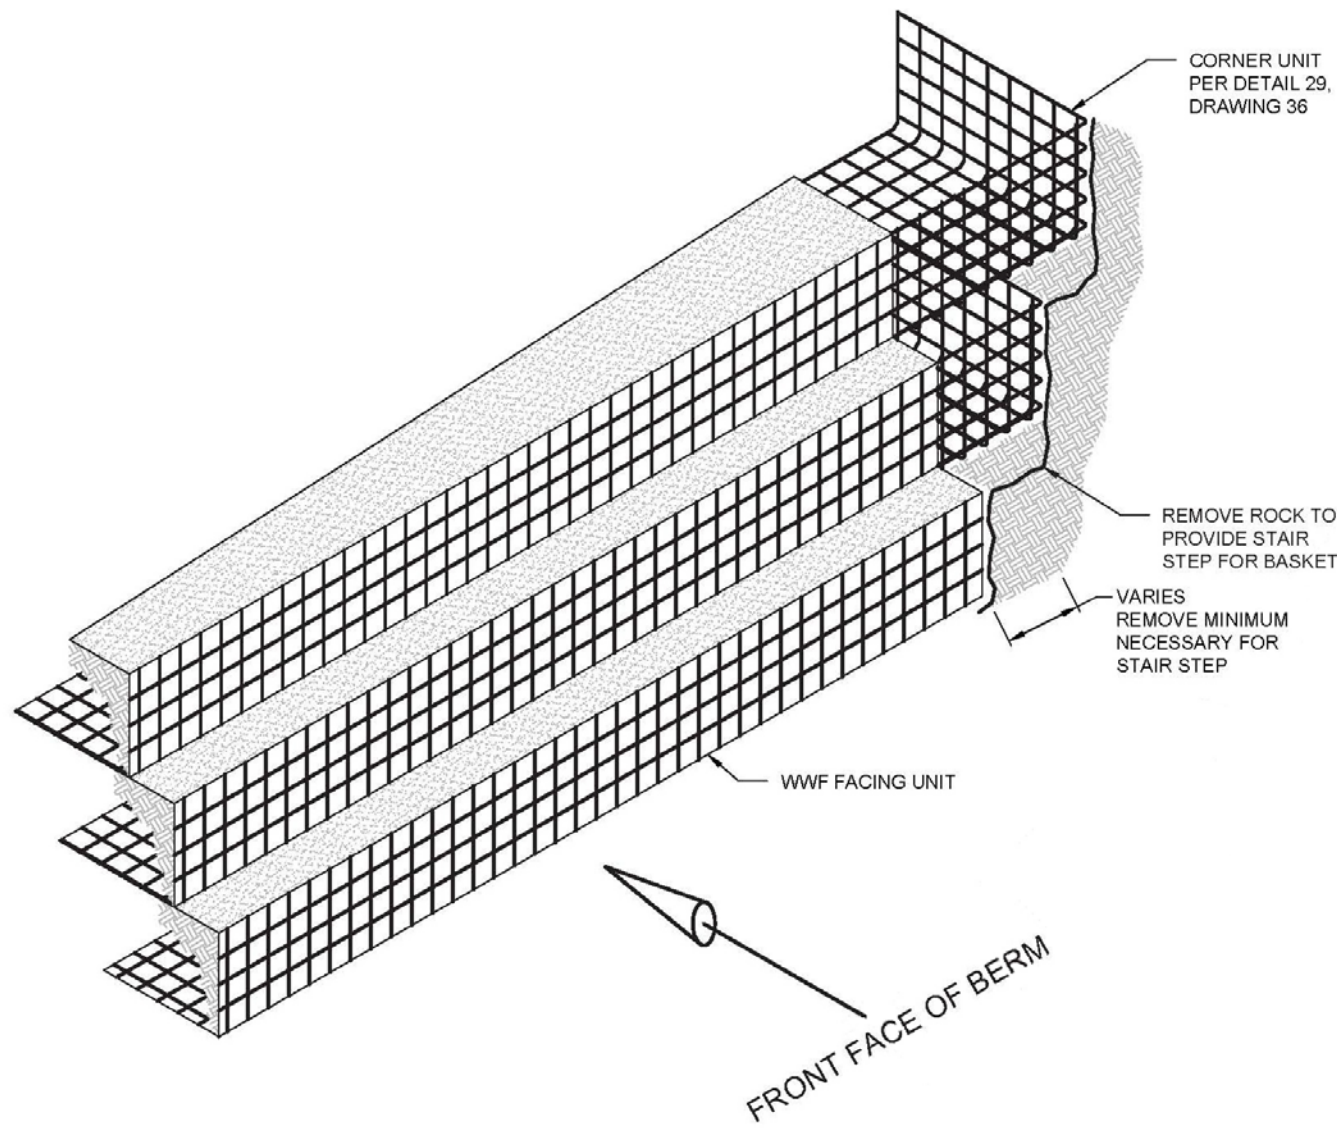



# Benefits and Additional Challenges

**Improved efficiency and safety for all crews involved**

**Typical installation (i.e., working from one end to the other) would have created downtimes for WM and our subcontractor.**

WM was responsible for the subgrade preparation, including rock removal. Our subcontractor was responsible for basket and geogrid placement. WM completed the backfill of each course.

# Installation split into three working sections

- South Wall Section (STA 0+00 to STA 8+00) includes:
  - Interior corner at STA 6+00
  - Leveling courses from STA 5+00 to STA 0+00
- Center Wall Section (STA 8+00 to STA 11+00) includes:
  - Exterior corner at STA 8+00
  - Interior corner at STA 11+00
  - Transition of geogrid around bedrock at STA 7+60 to STA 9+40
  - Change in geogrid length at STA 10+50
- North Wall Section (STA 11+00 to STA 15+83) includes:
  - Interior corner at STA 13+00
  - Leveling course from STA 12+50 to STA 15+83







# Improvements to efficiency

## Equipment

Working the MSE Berm in sections provided more efficient equipment flow, allowing:

- Multiple travel paths for access to/from the MSE Berm during fill placement and staging of wall components
- Separation of equipment, reducing the downtime due to equipment interferences

## Crews

Working the MSE Berm in sections created the potential to avoid bottlenecks such as:

- Inside corners being slower to construct, the new sequence allowed crews to construct around them
- Created large working areas for placing fill over the geogrid vs. potential to catch up to geogrid placement and waiting for geogrid
- Started MSE Berm where leveling pad wasn't needed, allowing pad to be constructed before wall reached that location. Also allowed subsequent course to start while crew completed leveling pad

# Improvements to safety

## Buffer zone between equipment and personnel

By working the MSE Berm in three sections, WM's approach provided more separation of ground crews from fill placement equipment, eliminating potential safety hazards.



# MSE Berm a critical piece of tight schedule

Improved efficiency helped overcome impacts.

WM's approach to MSE Berm construction, which allowed for working the berm in multiple sections, helped improve efficiency enough to counteract the negative potential of bedrock and weather impacts. When accounting for the 14 days of bedrock impact and 40+ days of weather impact, the MSE Berm was constructed within the proposed schedule.

## MSE Berm Construction Window



■ Normal Working Days ■ Days Impacted by Weather ■ Days Impacted by Bedrock







# Get in touch with us.

**Johnny Lowe, PE**

[jlowe10@wm.com](mailto:jlowe10@wm.com) | 704.937.5171

